

the **NOLAN** *company*

**TOOL AND SUPPLY
CARTS
AND DOLLIES**



THE NOLAN COMPANY
1016 Ninth Street SW ■ Canton, Ohio 44707 USA
Toll-free: 1-800-297-1383 or 330-453-7922
Toll-free Fax: 1-800-225-0984 or 330-453-7449
E-mail: Sales@NolanCompany.com
Web: NolanCompany.com



Aluminum Tool and Supply Carts: ATS-1B, ATS-2B MADE IN USA

Nolan's aluminum carts are lighter in weight than steel carts, yet still handle loads up to 5,000 lbs. The cart features a fully welded, square-tube frame with perforated deck.

NOW HOLDS UP TO 5,000 LBS!

NEW! Cart can be pushed in either direction without removing it from the track by simply detaching the handle from one end and inserting it into the other end of the cart. Both ends of the cart have parking brakes, providing stability and safety on track grades and during loading/unloading operations.

FEATURES

- The lightweight, two-piece design of the ATS allows easy one-person assembly
- Ergonomic hand-holds in deck surface allow easier handling during assembly.
- Heavy-duty aluminum deck is perforated to reduce the chance of load shifting, and is fully welded at all seams.
- Removable handle can be used at either end of cart. (Cart can be pushed from either end.)
- Now available on all models, parking brakes at both ends increase stability and security on track grades and when loading or unloading the cart.
- Deck platform reaches above wheels allowing easier loading/unloading and smooth transporting of oversize materials.
- Axles are insulated.
- Built for standard track gauge, 56½" (1,435 mm)



▲ Hand holds in the ATS-1B's deck make assembly easy.

▼ The ATS-1B cart shown after the two halves are connected and unfolded onto track assembled with handle in position.



SAFETY FEATURES AND SPECIFICATIONS: ATS Carts



Ergonomic hand-holds in deck surface allow easier and safer handling during assembly and storage.




NOW HOLDS UP TO 5,000 LBS!

NEW! Nolan's ATS aluminum carts now hold up to 5,000 lbs! Testing was conducted transporting 5,000 lb loads.



Unique safety latch secures both halves of the aluminum cart together, preventing the separation of the assembled cart. After use, removing the safety latch allows the two halves to be lifted upward and separated for easier removal and storage.

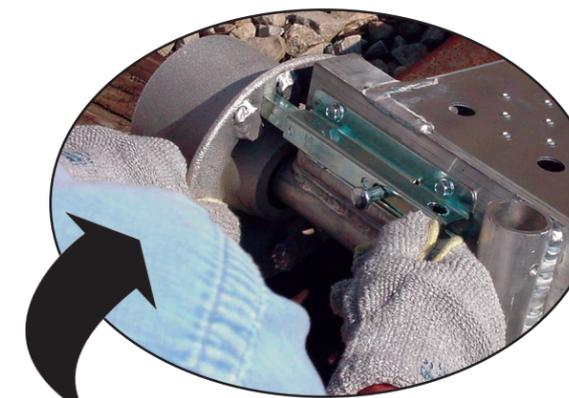

Setting the parking brakes, located on both ends of the cart, is fast and easy, locks the wheels, and secures and stabilizes the cart on track grades and during loading and unloading.

SPECIFICATIONS	ATS-1B (on previous page)	ATS-2B (not pictured)
Length - assembled	50" (1,270 mm)	50" (1,270 mm)
Width	63-1/2" (1,613 mm)	63-1/2" (1,613 mm)
Weight	98 lbs. (44 kg)	127 lbs. (58 kg)
Height (with handle)	36" (914 mm)	37-1/2" (953 mm)
Deck Height (above rails)	6-15/16" (176 mm)	8-7/16" (214 mm)
Deck Area	50" x 49" (1,270 mm x 1,245 mm)	50" x 49" (1,270 mm x 1,245 mm)
NEW! Load Capacity	5,000 lbs. (2,268 kg)	5,000 lbs. (2,268 kg)
Handle Weight	5 lbs. (2 kg)	5 lbs. (2 kg)
Wheel Type	5" Aluminum (127 mm)	8" Aluminum (203 mm)

Steel Tool and Supply Carts: TS-4, TS-5, TS-6 **MADE IN USA**



▲ TS-4 Tool and Supply Cart showing interlocking halves

Convenience, durability and a 5,000 lb. (2,268 kg) load capacity have made Nolan's Tool and Supply Carts an industry standard. The cart now features a fully-welded, all steel, square-tube frame with perforated steel deck. Easily handled by one person, the two-piece design fits together and locks securely. No screws, bolts or straps are required. Together, the sections form a large (47-5/8" x 52-1/4"), heavy duty, perforated steel deck. The push handle is removable and stake pockets provide for containment of deck area materials.

NEW! Cart can be pushed in either direction without removing it from the track by simply detaching the handle from one end and inserting it into the other end of the cart. Both ends of the cart have parking brakes, providing stability and safety on track grades and during loading/unloading operations.

FEATURES

- **Larger Deck Area** -- Deck size has increased by more than 400 square inches -- accommodating loads up to 5,000 pounds.
- **Cart Weighs Less** -- We reduced the weight of the TS Series carts 5% to 14% depending on the model -- helpful during setup on track, and for portability and storage.
- **Steel-perforated Deck Area** -- Cart has a strong, perforated steel deck to help keep loads from shifting.
- **Parking Brakes on Both Ends** -- Now available on all models, dual parking brakes increase stability and security on track grades and when loading or unloading the cart.
- **Easy Two-direction Travel** -- Cart can be pushed in either direction without removing cart from track by removing the detachable handle from one end and inserting into the opposite end.

Other features include:

- Fully welded, all steel frames
- Insulated axle with cast aluminum (or special ductile alloy) wheels with pre-greased, sealed ball bearings
- Built for standard 56-1/2" track gauge, but can be custom-built for a specific track gauge (wider track gauge only).



▲ TS-4 Tool and Supply Cart -- sold with 5-inch aluminum wheels

SPECIFICATIONS: TS Carts

SPECIFICATIONS	TS-4 (on previous page)	TS-5 (shown below)	TS-6 (shown below)
Length - assembled	56-3/4" over wheels (1,441 mm)	59-3/4" over wheels (1,518 mm)	56-3/4" over wheels (1,441 mm)
Width - assembled	63-1/2" over wheels (1,613 mm)	63-1/2" over wheels (1,613 mm)	63-1/2" over wheels (1,613 mm)
Weight	167 lbs. (76 kg)	191 lbs. (87 kg)	203 lbs. (92 kg)
Height (w/push handle)	27-5/8" from top of rail (701 mm)	29-1/8" from top of rail (740 mm)	27-5/8" from top of rail (701 mm)
Deck Height	9" from top of rail (229 mm)	10-1/2" from top of rail (267 mm)	9" from top of rail (229 mm)
Deck Area (L x W)	47-5/8" x 52-1/4" (1,210 mm x 1,327 mm)	47-5/8" x 52-1/4" (1,210 mm x 1,327 mm)	47-5/8" x 52-1/4" (1,210 mm x 1,327 mm)
Load Capacity	5,000 lbs. (2,268 kg)	5,000 lbs. (2,268 kg)	5,000 lbs. (2,268 kg)
Handle Weight	5 lbs. (2.27 kg)	5 lbs. (2.27 kg)	5 lbs. (2.27 kg)
Wheel Diameter/Type	5" Aluminum (127 mm)	8" Aluminum (203 mm)	5" Special Ductile Alloy (127 mm)




▲ TS-5 Tool and Supply Cart sold with 8-inch aluminum wheels



▲ TS-6 Tool and Supply Cart sold with 5-inch ductile alloy wheels

Call 1-800-297-1383 or 330-453-7922,
or visit our NEW website:
NolanCompany.com


SAFETY FEATURES: TS Carts

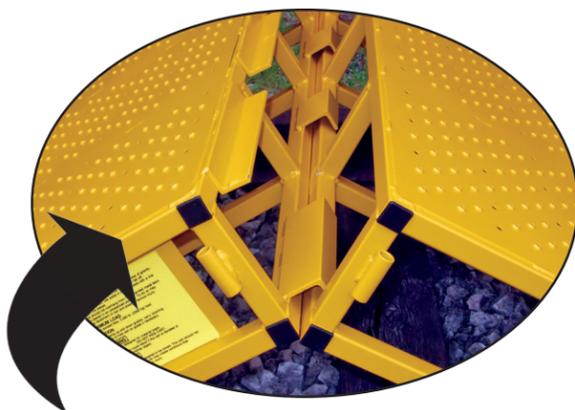


By positioning the two halves of the cart on the track, raised in the center with all wheels on the rail, and joining the two interlocking ends, the two pieces can be gradually lowered onto the track as the ends fit together to create a single unit.



Setting the safety latch pin locks the two halves of the cart together, preventing the separation of the assembled cart. After use, removing the safety latch allows the two halves to be lifted upward and separated for easier removal and storage.

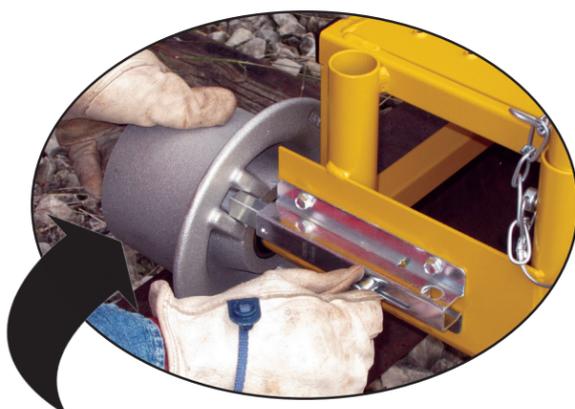

Setting the parking brakes, located on both ends of the cart, is fast and easy, locks the wheels, and secures and stabilizes the cart on track grades and during loading and unloading.

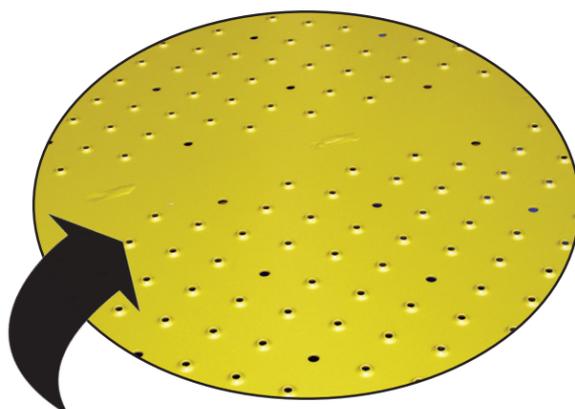

The TS series cart's new, perforated steel deck is an improvement over the expanded metal because it provides increased strength, yet still provides for minimal load slippage.

**OPTIONAL SAFETY FEATURE: Dead Man Brake
(available on ATS and TS Carts)**



▲ ATS cart showing close-ups of dead man brake

Track Dollies: TD-4, TD-5, TD-6 MADE IN USA

Model TD-4, TD-5 Track Dollies

Nolan's Track Dollies now feature fully-welded, all steel square-tube frame with perforated steel deck. The 1,500 lb. (680 kg) capacity Nolan Track Dolly is available in two models for use as a general maintenance carrier or inspector's dolly. Both TD-4 and TD-5 models are made of the same high quality metals as Nolan's steel tool and supply carts. The TD-4 is longer and slightly wider to more efficiently handle maintenance tools and materials. A kickstand-type spike adds stability during loading and unloading. TD-4 and TD-5 dollies have cast aluminum wheels, double-flanged with pre-greased, sealed ball type bearings.



▲ TD-5 Track Dolly showing **NEW CONSTRUCTION**

Model TD-6 Track Dolly

Also offering a 1,500 lb. (680 kg) capacity, the TD-6 is designed for larger, irregular loads that might be impractical for the two wheel models. The TD-6 also uses fully-welded, all steel square-tube frame construction. A stabilizing roller on a telescoping axle allows the 36-1/32" x 23-3/4" deck to accept larger sized loads, within the 1,500 lb. capacity. The removable handle may be installed on either end of the dolly, and the stabilizer wheel and axle retract into the frame, easing transport and storage. Built for standard 56-1/2" (1,435 mm) track gauge. TD-6 dolly has high carbon, square-tube steel frames with a heavy-duty, non-skid, perforated steel deck. Wheels are cast aluminum, double flanged, and fully insulated, with pre-greased, sealed ball type bearings.



▲ TD-6 Track Dolly showing **NEW CONSTRUCTION**

SPECIFICATIONS	TD-4 (not pictured)	TD-5 (shown above)	TD-6 (shown above)
Length	46" (1,168 mm)	36-1/4" (920 mm)	36-1/32" (915 mm)
Width	15-1/2" (394 mm)	14" (356 mm)	23-3/4" (603 mm)
Weight	74 lbs. (34 kg)	58 lbs (26 kg)	87 lbs. (40 kg)
Height (with handle)	34-1/4" (870 mm)	34-1/4" (870 mm)	32-1/2" (825 mm)
Deck Height (above rails)	8-1/4" (210 mm)	8-1/4" (210 mm)	10-1/8" (257 mm)
Deck Area	46" x 15-1/2" (1,168 mm x 394 mm)	36-1/4" x 14" (921 mm x 356 mm)	36-1/32" x 23-3/4" (915 mm x 603 mm)
Load Capacity	1,500 lbs. (680 kg)	1,500 lbs. (680 kg)	1,500 lbs. (680 kg)



1016 Ninth Street SW
Canton, Ohio 44707 USA

PRSRT STD
U.S. POSTAGE PAID
CANTON, OH
PERMIT NO. 705

Call 1-800-297-1383 or 330-453-7922,
or visit our NEW website:
NolanCompany.com

- **New Construction:** Steel carts and dollies have square-tube frames and perforated decks for added durability and load stability.
- **Parking Brakes:** Carts have parking brakes at both ends, providing stability and safety on track grades and during loading/unloading operations.
- **Load Capacity:** Carts have 5,000 lb capacity; dollies have 1,500 lb capacity.
- **Wheel Sizes:** Carts and dollies available with 5" or 8" aluminum wheels, or with 5" ductile alloy wheels.



**New Square-tube
Construction for Nolan's
Carts and Dollies!**