

## NOLAN'S ALUMINUM TOOL AND SUPPLY CARTS

**NEW!** Cart now holds up to 5,000 lbs!

**NEW!** Cart can be pushed in either direction without removing it from the track by simply detaching the handle from one end and inserting it into the other end of the cart. Both ends of the cart have parking brakes.

**NOW HOLDS  
UP TO  
5,000 LBS!**

- The lightweight, two-piece design of the ATS allows easy one-person assembly
- Ergonomic handholds in deck surface allow easier handling during assembly.
- Heavy-duty aluminum deck is perforated to reduce the chance of load shifting, and is fully welded at all seams.
- Removable handle can be used at either end of cart. (Cart can be pushed from either end.)
- Parking brake locks wheels and provides safety during loading/unloading -- and brake located at both ends
- Deck platform reaches above wheels allowing easier loading/unloading and smooth transporting of oversize materials.
- Axles are insulated.
- Built for standard track gauge, 56-1/2" (1,435 mm)



▲ Hand holds in the ATS-1B's deck make assembly easy.

▼ The ATS-1B cart shown after the two halves are connected and unfolded onto track assembled with handle in position.



**RAIL PRODUCTS FOR RAILROADS, INDUSTRY, MINES AND QUARRIES**

# NOLAN'S ALUMINUM TOOL AND SUPPLY CARTS

## FEATURES




Ergonomic hand-holds in deck surface allow easier and safer handling during assembly and storage.



**NEW!** Nolan's ATS aluminum carts now hold up to 5,000 lbs! Testing was conducted transporting 5,000 lb loads.



Unique safety latch secures both halves of the aluminum cart together, preventing the separation of the assembled cart. After use, removing the safety latch allows the two halves to be lifted upward and separated for easier removal and storage.

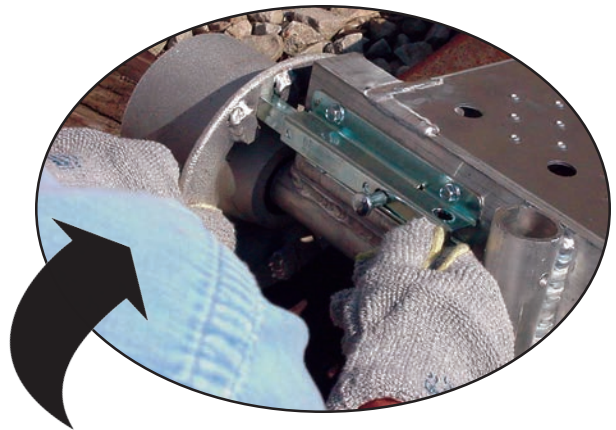

Setting the parking brakes, located on both ends of the cart, is fast and easy, locks the wheels, and secures and stabilizes the cart on track grades and during loading and unloading.

SPECIFICATIONS	ATS-1B	ATS-2B
Length - assembled	50" (1,270 mm)	50" (1,270 mm)
Width	63-1/2" (1,613 mm)	63-1/2" (1,613 mm)
Weight	98 lbs. (44 kg)	127 lbs. (58 kg)
Height (with handle)	36" (914 mm)	37-1/2" (953 mm)
Deck Height (above rails)	6-15/16" (176 mm)	8-7/16" (214 mm)
Deck Area	50" x 49" (1,270 mm x 1,245 mm)	50" x 49" (1,270 mm x 1,245 mm)
<b>NEW! Load Capacity</b>	<b>5,000 lbs. (2,268 kg)</b>	<b>5,000 lbs. (2,268 kg)</b>
Handle Weight	5 lbs. (2 kg)	5 lbs. (2 kg)
Wheel Type	5" Aluminum (127 mm)	8" Aluminum (203 mm)

**RAIL PRODUCTS FOR RAILROADS, INDUSTRY, MINES AND QUARRIES**